

MGSELLIN Linear

V412201, V412202, V412203

Description

The MGSELLIN is a slimline linear high power low glare high bay.

Environment

Indoor

Installation

Designed to be fixed to ceiling

Application


For use in factories, warehouses and other similar applications.



5YR Warranty	 IP40 Protection	50,000hrs Lifetime
------------------------	---	------------------------------

General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.9
Light Source	LED
CCT	5000k
LED Lifetime	50,000hrs
Operating temp	-15°C to 35°C
UGR	<19
Materials	Body - powder coated steel Microprismatic diffuser

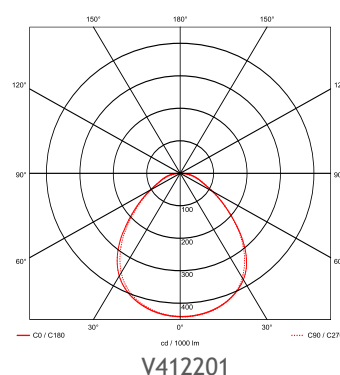

Light Data

Lumens per Watt	130lm/W
Light Source	LED
CRI	80
Distribution	110°

MGSELLIN Linear

V412201, V412202, V412203

Product Variants

Product Code	System Power (W)	Lumens (lm)	Length mm	Width mm	Height mm
V412201	150W	19,500	600	420	52
V412202	200W	26,000	900	420	52
V412203	300W	39,000	1200	420	52

Options

OPTION	CODE
1-10V Dimming	/D
DALI Dimming	/DL
DSI Digital Dimming	/DD
3 Hour Emergency	/M3
Self Test 3 Hour Emergency	/ST
PIR	/SN
Microwave Sensor	/MS